



产 品 规 格 书

Product Specification Sheet

TOP-XFP-CWDM-LR-XX

RoHS Compliant 10km CWDM XFP Optical Transceiver



E-MAIL: lisa@topsfp.com





PRODUCT FEATURES

- Supports 9.95Gbps to 11.1Gbps bit rates
- 4-Wavelengths Un-cooled CWDM DFB laser from 1270nm to 1330nm, with Step 20nm
- XFP MSA Rev 4.5 Compliant
- Maximum link length of 10km with SMF
- Very low EMI and excellent ESD protection
- High transmission margin
- +3.3V single power supply
- Below <1.5W power consumption
- Temperature range 0°C to 70°C

APPLICATIONS

- SDH STM I-64.1 at 9.953Gbps
- 10GBASE-LR/LW 10G Ethernet
- 10G Fiber Channel

PRODUCT DESCRIPTIONS

TOP-XFP-CWDM-LR-XX is compliant with the 10G Small Form-Factor Pluggable (XFP) Multi-Source Agreement (MSA), supporting data-rate of 10.3125Gbps(10GBASE-LR) or 9.953Gbps 10GBASE-LW), and transmission distance up to 10km on SMF.

The transceiver module comprises a transmitter with un-cooled CWDM DFB laser and a receiver with a PIN photodiode. Transmitter and receiver are separate within a wide temperature range of 0°C to

+70°C and offers optimum heat dissipation and excellent electromagnetic shielding thus enabling high port densities for 10 GbE systems.

**ABSOLUTE MAXIMUM RATINGS**

Parameter	Symbol	Min.	Max.	Unit	Note
Supply Voltage	V _{cc}	-0.5	4.0	V	
Storage Temperature		-40	85	°C	
Relative Humidity			85	%	

Note: Stress in excess of the maximum absolute ratings can cause permanent damage to the module

GERERAL OPERATING CHARACTERISTICS

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Data Rate	Ethernet		10.3125		Gb/s	
	Fiber Channel		10.518			
Supply Voltage	V _{cc}	3.13	3.3	3.47	V	
	V _{cc}				V	
Supply Current	I _{ccs}				mA	
	I _{ccs}			400	mA	
Operating Case Temp.	T _c	0		70	°C	

ELECTRICAL INPUT/OUTPUT CHARACTERISTICS

- Transmitter

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Diff. input voltage swing		120		820	mVpp	1
Tx Disable input	H	V _{IH}	2.0	V _{cc} +0.3	V	
	L	V _{IL}	0	0.8		
Tx Fault output	H	V _{OH}	2.0	V _{cc} +0.3	V	2
	L	V _{OL}	0	0.8		
Input Diff. Impedance	Z _{in}		100		Ω	

- Receiver

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Diff. output voltage swing		340	650	800	mVpp	3
Rx LOS Output	H	V _{OH}	2.0	V _{cc} +0.3	V	2
	L	V _{OL}	0	0.8		

Note 1) TD+/- are internally AC coupled with 100Ω differential termination inside the module.

Note 2) Tx Fault and Rx LOS are open collector outputs, which should be pulled up with 4.7k to 10kΩ resistors on the host board. Pull up voltage between 2.0V and V_{cc}+0.3V.

Note 3) RD+/- outputs are internally AC coupled, and should be terminated with 100Ω (differential) at the user SERDES.

PIN #	Name	Function	Notes
-------	------	----------	-------



TOPSTAR TECHNOLOGY INDUSTRIAL CO., LIMITED

OPTICAL CHARACTERISTICS

- Transmitter

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Operating Wavelength		1260		1355	nm	
Ave. output power (Enabled)	Po	-6		0	dBm	1
Extinction Ratio	ER	4			dB	1
RMS spectral width	$\Delta\lambda$			0.45	nm	
Rise/Fall time (20%~80%)	Tr/Tf			45	ps	2
Optical modulation amplitude	OMA			-2.8	dBm	
Dispersion penalty				3.9	dB	
Output Optical Eye	IEEE 802.3-2005 Compliant					


- Receiver

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Operating Wavelength		1260		1600	nm	
Sensitivity	Psen			-14.4	dBm	3
Min. overload	Pimax	0.5			dBm	
LOS Assert	Pa	-25			dBm	
LOS De-assert	Pd			-16	dBm	
LOS Hysteresis	Pd-Pa	0.5		4	dB	

Note 1) Measured at 10.3125b/s with PRBS 231 – 1 NRZ test pattern. Note 2) 20%~80%

Note 3) Under the ER worst case, measured at 10.3125 Gb/s with PRBS 231 - 1 NRZ test pattern for BER < 1x10⁻¹²

PIN DEFINITIONS AND FUNCTIONS

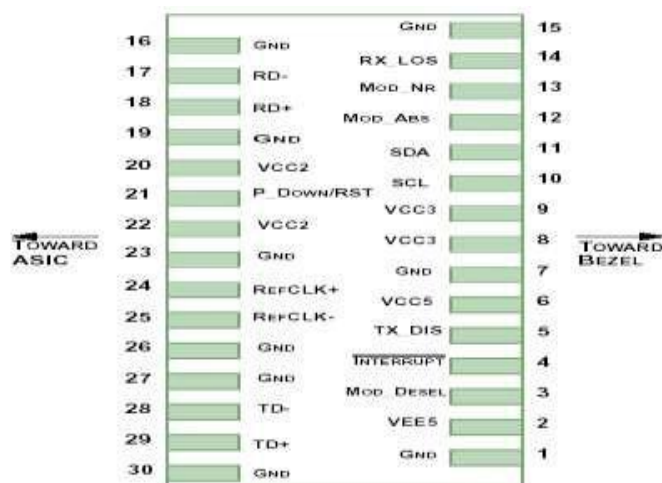



1		GND	Module Ground	1
2		VEE5	Optional -5.2V Power Supply (Not required)	
3	LVTTTL -I	MOD_DESEL	Module De-select; When held low allows the module to respond to 2-wire serial interface	
4	LVTTTL -O	INTb	Interrupt; Indicates presence of an important condition which can be read via the 2-wire	2
5	LVTTTL	TX_DIS	Transmitter Disable; Turns off transmitter	
6		VCC5	+5V Power Supply (Not required)	
7		GND	Module Ground	1
8		VCC3	+3.3V Power Supply	
9		VCC3	+3.3V Power Supply	
10	LVTTTL	SCL	2-Wire Serial Interface Clock	2
11	LVTTTL	SDA	2-Wire Serial Interface Data Line	2
12	LVTTTL	MOD_Abs	Indicates Module is not present. Grounded in	2
13	LVTTTL	MOD_NR	Module Not Ready; Indicating Module	2
14	LVTTTL	RX_LOS	Receiver Loss Of Signal Indicator	2
15		GND	Module Ground	1
16		GND	Module Ground	1
17	CML-	RDN	Receiver Inverted Data Output	
18	CML-	RDP	Receiver Non-Inverted Data Output	
19		GND	Module Ground	1
20		VCC2	+1.8V Power Supply (Not required).	
21	LVTTTL -I	P_DOWN/RST	Power down; When high, requires the module to limit power consumption to 1.5W or below. 2-Wire serial interface must be functional in	
21	LVTTTL -I	P_DOWN/RST	Reset; The falling edge initiates a complete reset of the module including the 2-wire serial	
22		VCC2	+1.8V Power Supply (Not required)	
23		GND	Module Ground	1
24	PECL-	REFCLKP	Not used, internally terminated to 50ohm	3
25	PECL-	REFCLKN	Not used, internally terminated to 50ohm	3
26		GND	Module Ground	1
27		GND	Module Ground	1
28	CML-I	TDN	Transmitter Inverted Data Input	
29	CML-I	TDP	Transmitter Non-Inverted Data Input	
30		GND	Module Ground	1

Notes:

Module circuit ground is isolated from module chassis ground within the module.

Open collector; should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.6V.

Reference Clock input is not required.

Management Interface


The transceivers provide serial ID memory contents and diagnostic information about the present operating conditions by the 2-wire serial interface (SCL, SDA).

The Module provides diagnostic information about the present operating




conditions. The transceiver generates this diagnostic data by digitization of internal analog signals Alarm/warning threshold data is written during device manufacture. Received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring all are implemented.

The digital diagnostic memory map specific data field defines as following.

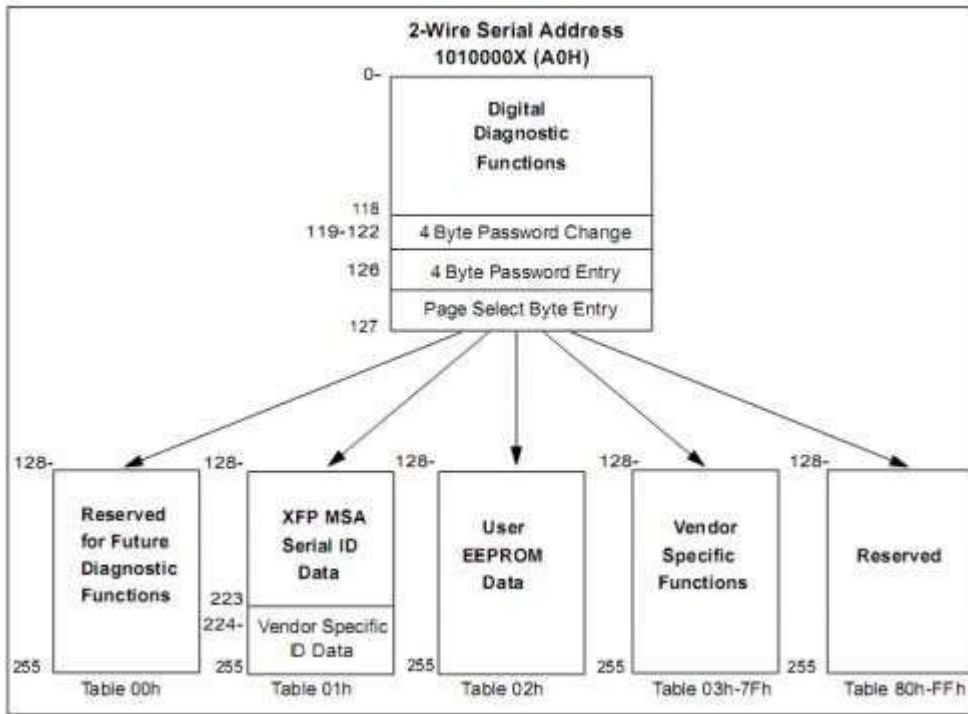


TYPICAL INTERFACE CIRCUIT

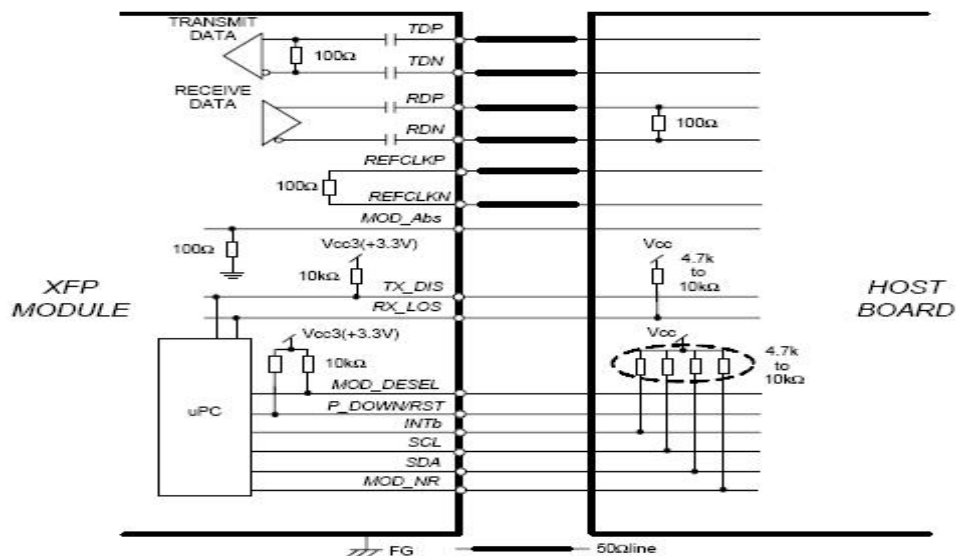



PACKAGE DIMENSIONS

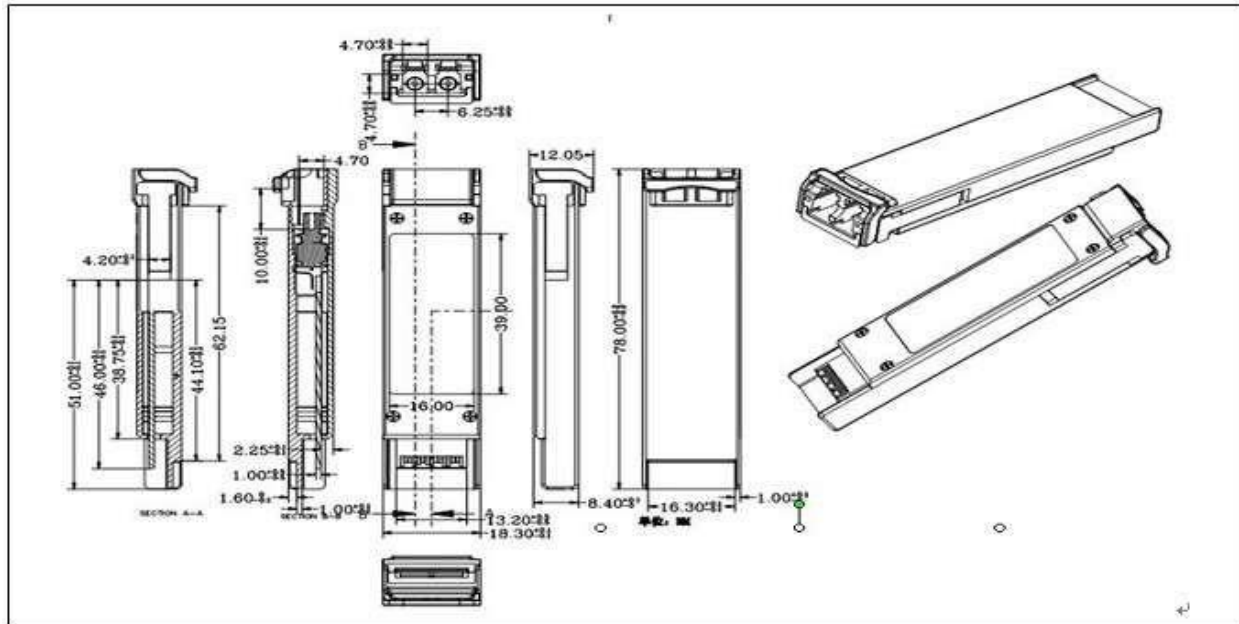

ORDERING INFORMATION

Part Number	D
TOP-XFP-CWDM-LR-27	XFP PLUS,10.3125Gbps, 1270nm, 10km, 0~70°C, with DDM
TOP-XFP-CWDM-LR-29	XFP PLUS,10.3125Gbps, 1290nm, 10km, 0~70°C, with DDM
TOP-XFP-CWDM-LR-31	XFP PLUS,10.3125Gbps, 1310nm, 10km, 0~70°C, with DDM
TOP-XFP-CWDM-LR-33	XFP PLUS,10.3125Gbps, 1330nm, 10km, 0~70°C, with DDM



TOPSTAR TECHNOLOGY INDUSTRIAL CO., LIMITED

Topstar Technology Industrial Co., Ltd

**Add: F5, Rongcheng Building, 28 Yayuan Road Wuhe Community,
BanTian Street, Shenzhen, China**

Tel: +86 755 8255 2969 Email:lisa@topsfp.com

Skype: lisalin6565 Whatsapp: +86 13798265065

Wechat: 251081707

Facebook and Linked in: Topstar Technology Industrial Co., Ltd

